

# Data Sheet

## FORECLAD RT



Foreclad roofing & cladding is manufactured in three variations, R, RS and RT.

R is the standard default profile for the Foreclad and is the recommended choice. It is possible to add swages or mini ribs to the profile if specifically required, though extra care must be taken when fixing the sheet. With the swages added to the sheet it becomes our RS profile. Or with the mini ribs added it becomes our RT profile.


All variations of the Foreclad profile are available in various colours using colour coated steel which is sourced from only trusted mill producers.

Our roofing sheets are suitable for a wide variety of purposes including but not limited to industrial buildings, agricultural buildings, domestic projects and commercials projects.

Foreclad can be manufactured from short to substantially long lengths and is suitable both for single skin applications or to form part of a twin skin system.

The bulk of the stock carried by Foregale is 200 micron leather grain plastisol as this is the standard material used in the UK. We keep stock of this mainly in 0.7mm but also in 0.5mm. Though there are many manufacturers of plastisol material, at Foregale we are careful only to select trusted and reputable steel mills.

Plastisol guarantees may be available from the steel mill with prior notice and the request given to us when ordering, it is subject to actual material used in production. It is also subject to a completed application form and the terms and conditions of the relevant steel mill for the material used as to the duration (if given) of any guarantee provided by the mill.

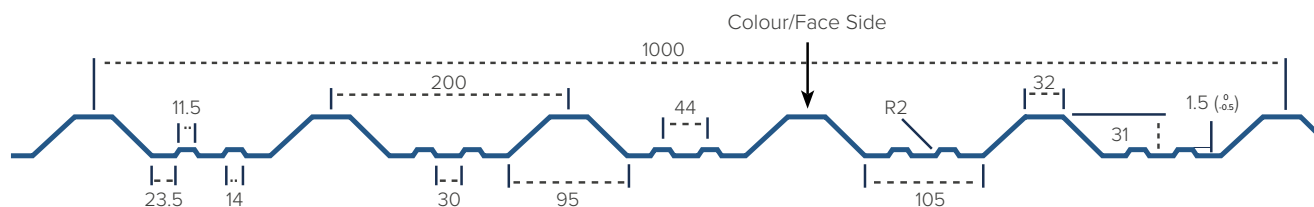

| DIMENSION DETAILS |        |              |       |
|-------------------|--------|--------------|-------|
| COVER WIDTH       | 1000mm | CROWN WIDTH  | 32mm  |
| PROFILE PITCH     | 200mm  | VALLEY WIDTH | 105mm |
| PROFILE DEPTH     | 31mm   | RIB WIDTH    | 95mm  |

| APPROXIMATE WEIGHT PER LINEAR METRE |         |
|-------------------------------------|---------|
| 0.7mm                               | 6.70 kg |
| 0.5mm                               | 4.79 kg |

| SAFE WORKING LOAD (ULTIMATE / 1.5) |             |           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------|-------------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| SPAN (M)                           |             |           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| POSITIVE PRESSURE                  | L/200       | THICKNESS | 1.00 | 1.10 | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | 1.90 | 2.00 | 2.10 | 2.20 | 2.30 | 2.40 | 2.50 | 2.60 |
|                                    | SINGLE SPAN | 0.7       | 6.11 | 5.05 | 4.24 | 3.61 | 3.12 | 2.62 | 2.16 | 1.80 | 1.52 | 1.29 | 1.11 | 0.96 | 0.83 | 0.73 | 0.64 | 0.57 | 0.50 |
|                                    | DOUBLE SPAN | 0.7       | 3.30 | 2.87 | 2.52 | 2.23 | 1.99 | 1.78 | 1.61 | 1.46 | 1.34 | 1.22 | 1.13 | 1.04 | 0.96 | 0.89 | 0.83 | 0.78 | 0.73 |
|                                    | MULTI SPAN  | 0.7       | 3.92 | 3.41 | 3.00 | 2.66 | 2.38 | 2.14 | 1.93 | 1.76 | 1.61 | 1.47 | 1.36 | 1.25 | 1.16 | 1.08 | 1.01 | 0.94 | 0.84 |
|                                    | SINGLE SPAN | 0.5       | 3.10 | 2.82 | 2.59 | 2.24 | 1.93 | 1.68 | 1.42 | 1.18 | 1.00 | 0.85 | 0.73 | 0.63 | 0.55 | 0.48 | 0.42 | 0.37 | 0.33 |
|                                    | DOUBLE SPAN | 0.5       | 1.81 | 1.58 | 1.39 | 1.24 | 1.11 | 1.00 | 0.91 | 0.83 | 0.76 | 0.69 | 0.64 | 0.59 | 0.55 | 0.51 | 0.48 | 0.45 | 0.42 |
|                                    | MULTI SPAN  | 0.5       | 2.14 | 1.87 | 1.65 | 1.47 | 1.32 | 1.19 | 1.08 | 0.99 | 0.91 | 0.83 | 0.77 | 0.71 | 0.66 | 0.62 | 0.58 | 0.54 | 0.51 |

| SAFE WORKING LOAD (ULTIMATE / 1.5) |             |           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------|-------------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| SPAN (M)                           |             |           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| SUCTION                            | L/200       | THICKNESS | 1.00 | 1.10 | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | 1.90 | 2.00 | 2.10 | 2.20 | 2.30 | 2.40 | 2.50 | 2.60 |
|                                    | SINGLE SPAN | 0.7       | 5.66 | 4.68 | 3.93 | 3.26 | 2.61 | 2.12 | 1.75 | 1.46 | 1.23 | 1.04 | 0.89 | 0.77 | 0.67 | 0.59 | 0.52 | 0.46 | 0.41 |
|                                    | DOUBLE SPAN | 0.7       | 3.42 | 2.97 | 2.61 | 2.32 | 2.07 | 1.86 | 1.68 | 1.53 | 1.40 | 1.28 | 1.18 | 1.09 | 1.01 | 0.94 | 0.86 | 0.76 | 0.68 |
|                                    | MULTI SPAN  | 0.7       | 4.05 | 3.53 | 3.11 | 2.76 | 2.47 | 2.23 | 2.02 | 1.84 | 1.68 | 1.54 | 1.42 | 1.29 | 1.12 | 0.98 | 0.86 | 0.76 | 0.68 |
|                                    | SINGLE SPAN | 0.5       | 3.10 | 2.82 | 2.42 | 2.06 | 1.71 | 1.39 | 1.14 | 0.95 | 0.80 | 0.68 | 0.59 | 0.51 | 0.44 | 0.39 | 0.34 | 0.30 | 0.27 |
|                                    | DOUBLE SPAN | 0.5       | 1.87 | 1.64 | 1.45 | 1.29 | 1.16 | 1.04 | 0.95 | 0.86 | 0.79 | 0.73 | 0.67 | 0.62 | 0.58 | 0.54 | 0.50 | 0.47 | 0.44 |
|                                    | MULTI SPAN  | 0.5       | 2.21 | 1.94 | 1.71 | 1.53 | 1.37 | 1.24 | 1.13 | 1.03 | 0.94 | 0.87 | 0.80 | 0.75 | 0.69 | 0.64 | 0.56 | 0.50 | 0.44 |